



Politecnico  
di Bari

Repository Istituzionale dei Prodotti della Ricerca del Politecnico di Bari

Gain and phase control in a graphene-loaded reconfigurable antenna

This is a post print of the following article

*Original Citation:*

Gain and phase control in a graphene-loaded reconfigurable antenna / Grande, Marco; Valerio Bianco, Giuseppe; Laneve, Dario; Capezzuto, Pio; Petruzzelli, Vincenzo; Scalora, Michael; Prudenzano, Francesco; Bruno, Giovanni; D'Orazio, Antonella. - In: APPLIED PHYSICS LETTERS. - ISSN 0003-6951. - STAMPA. - 115:13(2019).  
[10.1063/1.5111868]

*Availability:*

This version is available at <http://hdl.handle.net/11589/188498> since: 2021-03-12

*Published version*

DOI:10.1063/1.5111868

Publisher:

*Terms of use:*

(Article begins on next page)

Marco Grande, Giuseppe Valerio Bianco, Dario Laneve, Pio Capezzuto, Vincenzo Petruzzelli, Michael Scalora, Francesco Prudeniano, Giovanni Bruno, and Antonella D'Orazio, "Gain and phase control in a graphene-loaded reconfigurable antenna", *Appl. Phys. Lett.* 115, 133103 (2019).

<https://doi.org/10.1063/1.5111868>

# Gain and phase control in a graphene-loaded reconfigurable antenna

Marco Grande<sup>1,2,\*</sup>, Giuseppe Valerio Bianco<sup>2,\*</sup>, Dario Laneve<sup>1</sup>, Pio Capezzuto<sup>2</sup>,  
Vincenzo Petruzzelli<sup>1</sup>, Michael Scalora<sup>4</sup>, Francesco Prudeniano<sup>1</sup>,  
Giovanni Bruno<sup>2</sup> and Antonella D’Orazio<sup>1</sup>

<sup>1</sup> Dipartimento di Ingegneria Elettrica e dell’Informazione, Politecnico di Bari,  
Via Re David 200, 70125 - Bari, Italy,

<sup>2</sup> Istituto di Nanotecnologia – CNR-NANOTEC, Via Orabona, 4, 70125 - Bari, Italy,

<sup>4</sup> Charles M. Bowden Research Center, CCDEVCOM Redstone Arsenal, Alabama 35898-5000 – USA

\*These Authors contribute equally to this work

marco.grande@poliba.it

giuseppevalerio.bianco@cnr.it

## Abstract

We propose a reconfigurable scheme consisting of an antenna loaded by a CVD graphene capacitor. We show how the gated-graphene can actively control the antenna gain by about 2-3 dB and the phase of far-field electric field by about 45 degrees. The proposed idea could be efficiently adapted to antennas with different geometries and operating frequencies becoming transparent with respect to antenna technologies. We believe that these results clear a path towards graphene-based antenna systems for reconfigurable and smart telecommunication systems.

## Introduction

Modern communications demand reconfigurable antennas that offer the possibility to control and modify: the radiation pattern, the polarization, and the desired frequency [1]. Several solutions have been explored in order to modify the radiation behavior of antennas such as RF-MEMS, PIN diodes, photoconductive materials, ferrites and liquid crystals [1]. In these cases, reconfigurable antennas modify the current distribution of the radiating element modifying the far-field response of the antenna itself. For example, Ref. [2] reports on a compact, semicircular slot antenna operating at 3.4 GHz (sub-6GHz range communications) able to switch between two circular polarization states by means of two PIN diodes.

On the other hand, phased arrays can control directivity, side-lobes, zeros (for unwanted signals) by engineering the Array Factor that multiplies the single antenna radiation pattern [3].

These systems rely on the amplitude and phase control of each single antenna. It is worth noting that these configurations require complex electronic circuits to control each single antenna in the array [3]. For example, in 2013, Samsung proposed a 32-element phased array that operates at 28 GHz [4] while Mitsubishi Electric Corporation and Nokia have developed an active phased array antenna prototype for multi-beamforming technology [5]. In 2016, researchers at the University of California, San Diego (UCSD) presented the first 60-GHz wafer-scale transmit phased arrays with 64- and 256-elements with a compact footprint [6].

Both reconfigurable antennas and phased arrays are at the basis of smart antennas where the hardware and algorithms are mixed together [7]. All these examples show how the control of amplitude and phase is crucial for upcoming communications technologies.

In this scenario, graphene finds interesting applications due to the ability to modify and tune its electromagnetic behavior, in both photonic and microwave ranges thanks to its pronounced electric field effect [8].

To date, graphene has been only proposed in numerical simulations for reconfigurable antennas where the graphene acts as conductive material for tunable antennas in the THz range showing tunable conductivity [9-11]. At the same time, a few examples envisioned graphene as a switch (variation of conductivity) for microwave and wireless antennas [12-14]. It is worth highlighting that these designs are based on theoretical assumptions/models and no experimental evidence are reported for the simulated conductivity.

In this regard, the present authors have experimentally demonstrated the possibility to tune the amplitude and phase of a ring resonator operating in the microwave range [15]. This static configuration showed the possibility to achieve amplitude and phase modulation. At the same time, we have recently experimentally demonstrated the possibility to realize a first prototype of optically transparent antenna exploiting highly doped CVD graphene as the conductive material [16] for large-area applications.

In this paper, we propose a different reconfigurable scheme where an antenna is loaded by a CVD graphene capacitor. In particular, we show how the electrolyte-gated graphene, in the double-layer capacitor, can actively control the gain and the phase of the far-field electric field. Without loss of generality, we consider a standard, patch antenna for GPS applications. This simple system allowed us to verify the idea of graphene-based gain and phase control on a mature antenna technology. At the same time, it also allowed us to test this approach on a large area CVD graphene. In particular, we analyze the antenna response in terms of: (i) reflection coefficient (scattering parameter  $S_{11}$ ); and (ii) far-field behavior by considering the antenna

gain and the phase of the electric field when the gate voltage of graphene-capacitor is changed in the electrochemical window.

It is worth noting that the proposed idea could be translated to higher frequencies, since graphene response at microwaves is frequency independent [17], and may also be combined with other antenna geometries and technologies taking also advantage of graphene optical transparency. In our view, this is a winning point of our scheme since the proposed configuration can be adjusted for the operating frequency becoming independent with respect to antenna technologies.

## Results and discussion

Figure 1(a) shows the picture of the Global Positioning System (GPS) antenna loaded with the graphene capacitor. The GPS patch antenna operates in the L band. The double-layer capacitor is realized by sandwiching the electrolyte (thickness equal to 100 microns) between two bilayer (2L) graphene sheets that are supported by PET substrates. Further details on the graphene capacitor are reported here [18]. The size of the graphene area is larger than the GPS patch. In this configuration graphene sheets can be modelled as two boundary conditions introducing two sheet currents ( $J = \sigma * E$ , where  $\sigma = 1/R_s$ ,  $R_s$  is the sheet resistance [17]). Blue squares in Figure 1(b) shows the experimental sheet resistance of the front layer (the one close to the antenna,) while red dots refer to the back layer when the gate voltage  $V_g$  is varied. We can consider this symmetric behavior since two layers act in a similar way as demonstrated afterwards.

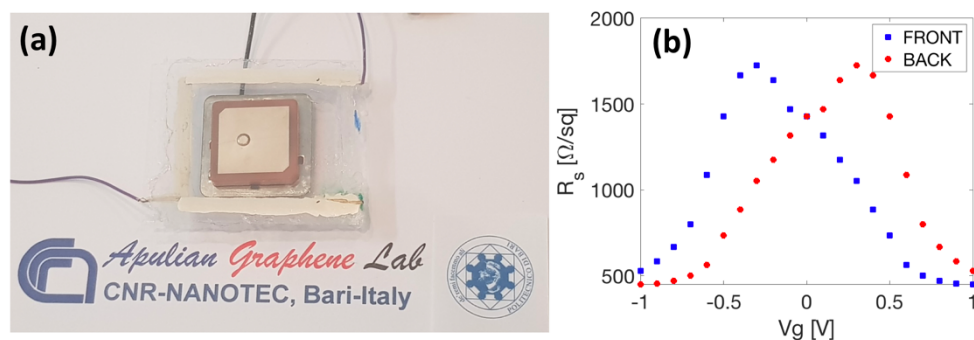


Figure 1: (a) Picture of the graphene-loaded GPS antenna. (b) Experimental sheet resistance of the front 2L graphene close to the antenna (blue dots) and of the back layer (red dots) when the gate voltage  $V_g$  is varied in the electrochemical window.

The scattering parameter  $S_{11}$  of the antenna was measured by means of a Vector Network Analyzer (Keysight N9923A FieldFox) as shown in Figure 2 (a). The gate voltage was

increased from -1 V to +1 V, with a step of +0.4 V, and the scattering parameter  $S_{11}$  of the loaded antenna was measured at each voltage step. The plots reveal that for a null gate voltage, the  $S_{11}$  is about -25dB at 1.55 GHz. Scattering parameter  $S_{11}$  reaches about -18 dB and -32 dB when the gate voltage is equal to -1 V and +1 V, respectively. Over the electrochemical window there is an  $S_{11}$  variation of almost 15 dB. The minimum is slightly shifted of about 3 MHz from 1.554 GHz ( $f_{min}$ ) down to 1.551 GHz, when the gate voltage is decreased from +1 V to -1 V. In this case, this asymmetric behavior can be explained by considering that the boundary conditions swap/switch with the inversion of the polarity. This behavior is translated in the variation of the phase of the scattering parameter  $S_{11}$  as displayed in Figure 2 (b). The phase is unchanged at the  $f_m$  (equal to 1.554 GHz) while the phase increases (decrease) when  $f < f_{min}$  and decreases (increases) when  $f > f_{min}$  moving from 0V to -1V (moving from 0V to +1V). The maximum phase shift for the reflection coefficient is about 60 degrees at 1.547 GHz).

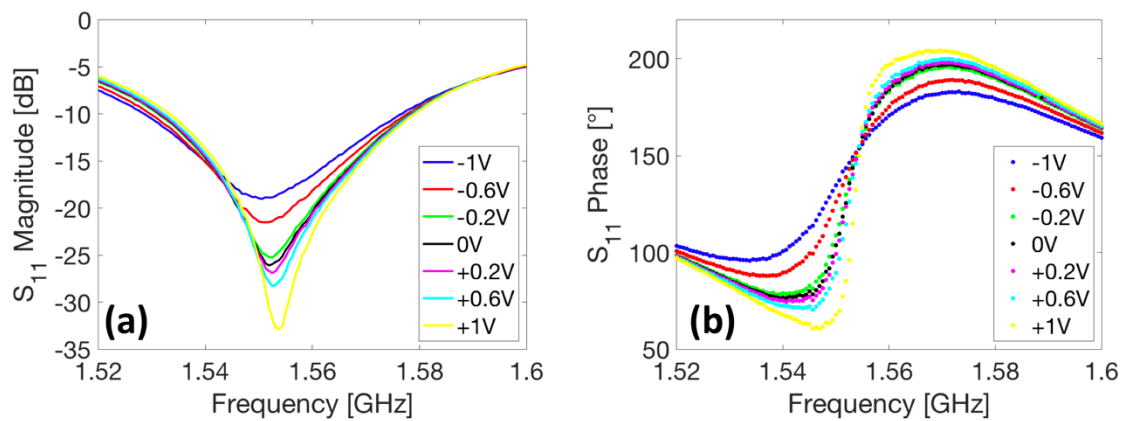


Figure 2: (a) Measured  $S_{11}$  magnitude and (b) measured phase of the antenna scattering parameter  $S_{11}$  when the gate voltage  $V_g$  is varied in the electrochemical window.

The far-field behavior of the antenna was investigated by means of the anechoic chamber StarLab from Satimo in the 1.5-1.6 GHz range [16]. The system allows performing rapid 3D measurements of the radiation pattern reconstructing the Far Field (FF) from the Near Field (NF) by means of the Huygens' principle.

Figure 3(a) shows the boresight gain measured at normal direction with respect to the antenna plane (y-axis in Figure 5). In this case, the maximum gain is achieved at null gate voltage since the graphene exhibits lossy-dielectric behavior. As the modulus of the voltage is increased, the gain is reduced since the graphene moves towards metallic behavior. Interestingly, the gain curves for  $V_g$  equal to  $\pm 0.2V$  almost overlap while the curves for  $\pm 0.6V$  and  $\pm 1V$  are very close. These results demonstrate once again that the behavior of the front and back layers is

almost identical. All plots exhibit the same trend. Therefore, the presence of the graphene capacitor does not alter/distort the gain function.

This is confirmed by the plot in Figure 3(b), which shows the gain at 1.55 GHz (frequency of the maximum gain in Figure 3(a)) when the gate voltage is varied in the electrochemical window. In particular, an almost linear variation of about 2.3 dB is experimentally demonstrated between -1.9 and -4.2 dB (the gain for the unloaded antenna is about 5 dB). The experimental results reveal that changing the polarity of the gate voltage does not have a strong influence on the far-field response of the graphene-loaded antenna. This means that the presence of two graphene layers does not affect the far-field response. This is opposite to the behavior shown by the reflection coefficient as demonstrated in Figure 2.

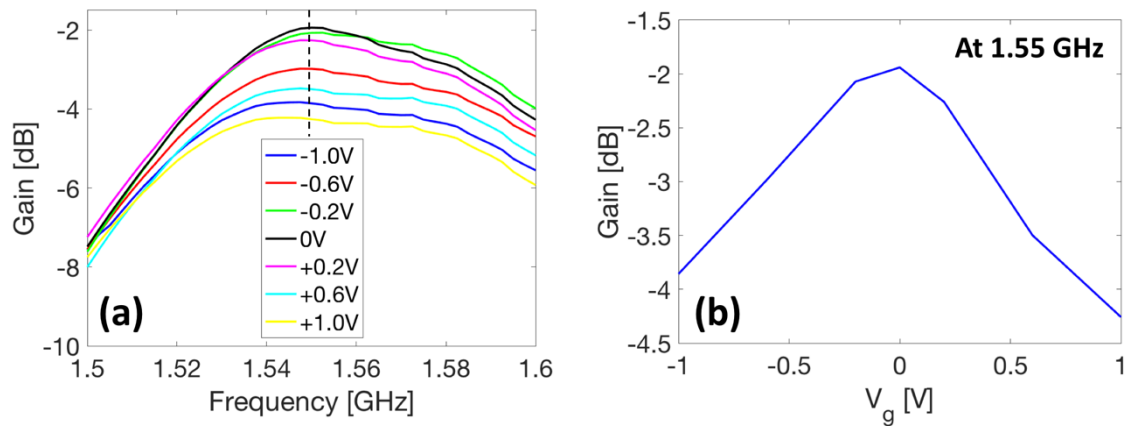


Figure 3: (a) Measured gain in the frequency range of interest when the gate voltage is varied. (b) Measured gain vs in the gate voltage.

The test station StarLab also allowed us to measure the phase of the far-field electric field in terms of  $E_\theta$  and  $E_\phi$  when the normal direction with respect to the antenna plane is considered. Experimental measurements show that  $E_\phi$  is insensitive (the change is in the 1-3 degrees range) while the phase of  $E_\theta$  changes with the gate voltage. Figure 4(a) shows the phase of  $E_\phi$  in the 1.5-1.6 GHz range. In this case, the phase curves for  $V_g$  referring to  $\pm 0.2V$  and  $\pm 0.6V$  almost overlap while the curves for  $\pm 1V$  are very close. Figure 4(b) reports the phase of  $E_\theta$  at 1.55 GHz in the electrochemical window with a maximum variation of 45 degrees. The curve in Figure 4(b) is also symmetric as expected due to the symmetry of the front and back layers. Finally, the curve trend of phase of  $E_\theta$  resembles that of the gain in Figure 3(b).

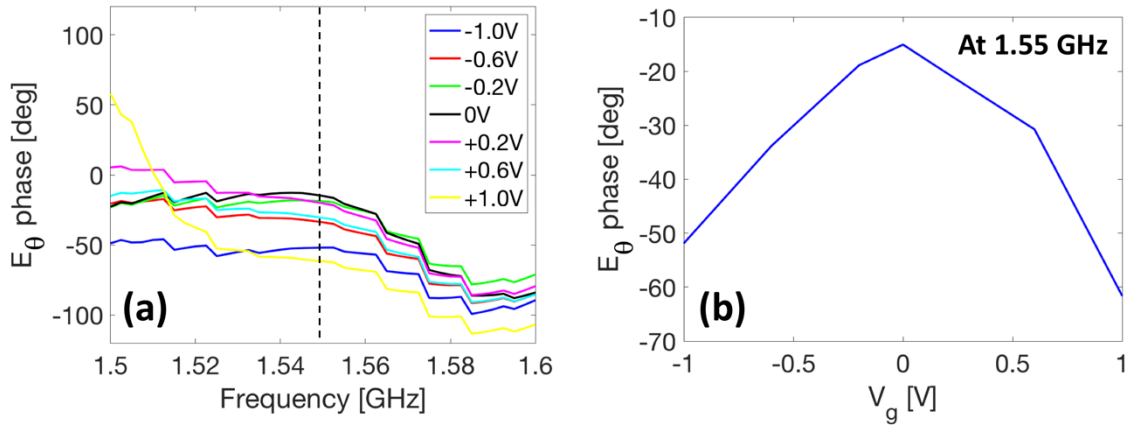


Figure 4: (a) Measured  $E_\theta$  phase variation in the frequency range of interest when the gate voltage is varied. (b) Measured  $E_\theta$  phase at 1.55 GHz when the gate voltage is varied in the electrochemical window.

Finally, we considered the radiation pattern of the graphene-loaded GPS antenna. Figure 5 shows the polar plot of the radiation patterns in the  $xz$ -plane ( $\varphi=90^\circ$ ) at 1.55 GHz for positive gate voltage (radiation patterns for  $\varphi=0^\circ$  and negative gate voltages display almost identical behavior and, hence, they are not shown for clarity). Figure 5(b) illustrates the experimental 3D radiation pattern of the graphene-loaded antenna at  $V_g=0$  V. As expected the gain is changed while the phase is significantly affected.

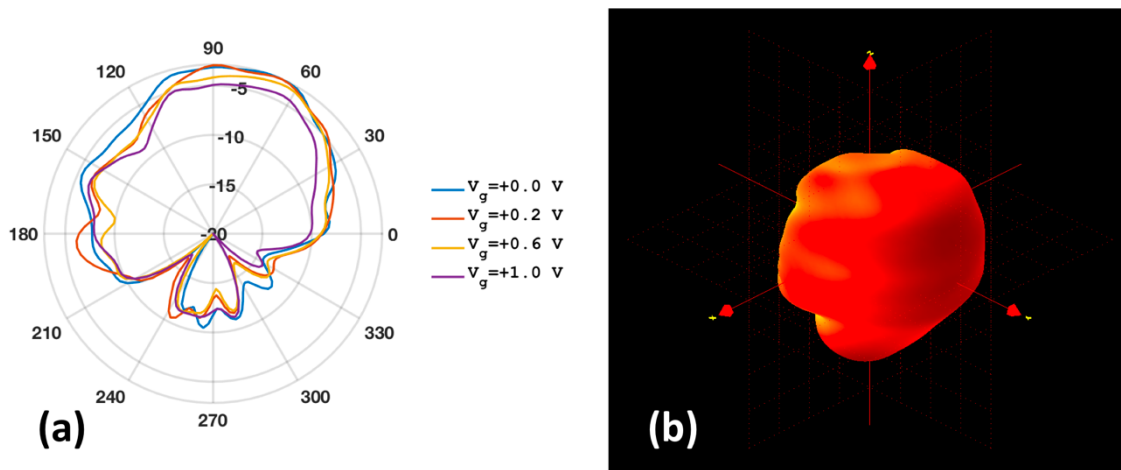


Figure 5: (a) Radiation pattern in the  $xz$ -plane ( $\varphi=90^\circ$ ), at 1.55 GHz when the gate voltage is varied. The tilt in the patterns is also evident in the unloaded GPS antenna. (b) Experimental 3D radiation pattern at  $V_g=0$  V.

## **Conclusion**

In conclusion, we have proposed a reconfigurable scheme consisting of an antenna loaded by a CVD graphene capacitor. The proposed scheme offers the ability to vary the antenna gain by about 2-3 dB and the phase of far-field electric field of about 45 degrees. This is a first mere example of how graphene can be efficiently integrated in telecommunications systems for smart antennas.

We also believe that these results point to a way towards optimized configurations that could increase the range of the gain and phase control.

These results also raise new challenges about the possibility of integrating and extending this approach to other microwave devices such as filters, matching circuits, microwave resonators moving from static configurations to reconfigurable ones.

Graphene could be easily integrated in different antenna geometries based on patches, slots, DRAs, aperture antennas, parasitic steerable arrays leading to innovative architectures. Our scheme could also be extended to antennas arrays covering the array leading to transmit-arrays [19], where the electromagnetic field can pass through the graphene capacitor. At the same time, the proposed approach could be also applied beginning with quasi-metallic graphene in order to work in reflection as for reflectarrays and active frequency selective surface [20].

## **Funding**

Research was sponsored by the RDECOM, RFEC-Atlantic and the US Army Aviation and Missile Research, Development and Engineering Center and was accomplished under Grant Numbers W911NF-16-2-0236 and W911NF-18-1-0263. The views and conclusions contained in this document are those of the authors and should not be interpreted as representing the official policies, either expressed or implied, of the AMRDEC or the U.S. Government.

## **Acknowledgments**

A. Sacchetti at CNR-NANOTEC is acknowledged for his technical assistance during graphene growth and transferring.

## Bibliography

- [1] C. G. Christodoulou, Y. Tawk, S. A. Lane and S. R. Erwin, "Reconfigurable antennas for wireless and space applications," *Proceedings of the IEEE*, vol. 100, no. 7, pp. 2250-2261 (2012).
- [2] Y. I. A. Al-Yasir, A. S. Abdullah, N. O. Parchin, R. A. Abd-Alhameed, J. M. Noras, "A new polarization-reconfigurable antenna for 5G applications", *Electronics*, vol. 7, no. 11, p. 293 (2018).
- [3] A. H. Naqvi and S. Lim, "Review of recent phased arrays for millimeter-wave wireless communication", *Sensors*, vol. 18 no. 10, 3194 (2018).
- [4] W. Hong, K.H.Baek, Y. Lee, Y. Kim, S.T. Ko, "Study and prototyping of practically large-scale mmWave antenna systems for 5G cellular devices". *IEEE Commun.*, vol. 52, pp. 63–69 (2014).
- [5] Mitsubishi Electric Develops Prototype Active Phased Array Antenna for 5G, Mitsubishi Electr. Corp., Tokyo, Japan (2015).
- [6] S. Zahir, O. D. Gurbuz, A. Kar-Roy, S. Raman and G. M. Rebeiz, "60-GHz 64- and 256-Elements Wafer-Scale Phased-Array Transmitters Using Full-Reticle and Subreticle Stitching Techniques," *IEEE Transactions on Microwave Theory and Techniques*, vol. 64, no. 12, pp. 4701-4719 (2016).
- [7] C. A. Balanis, "Antenna theory analysis and design - Third Edition" John Wiley & Sons, Inc., Publication (2005).
- [8] K. S. Novoselov, A. K. Geim, S. V. Morozov, D. Jiang, Y. Zhang, S. V. Dubonos, I. V. Grigorieva, A. A. Firsov, "Electric Field Effect in Atomically Thin Carbon Films", *Science*, vol. 306, issue 5696, pp. 666-669 (2004).
- [9] D. Correas-Serrano and J. S. Gomez-Diaz, "Graphene-based Antennas for Terahertz Systems: A Review", *Forum for Electromagnetic Research Methods and Application Technologies, FERMAT* (2017).
- [10] Y. Wu, M. Qu, L. Jiao, Y. Liu, and Z. Ghassemlooy, "Graphene-based Yagi-Uda antenna with reconfigurable radiation patterns", *AIP Advances* vol. 6, no. 065308 (2016).
- [11] M. Tamagnone, S. Capdevila, A. Lombardo, J. Wu, A. Centeno, A. Zurutuza, A. Ionescu and A.C. Ferrari, J. R. Mosig, "Graphene reflectarray metasurface for terahertz beam steering and phase modulation". *arXiv preprint arXiv:1806.02202* (2018).
- [12] C. Núñez Álvarez, R. Cheung and J. S. Thompson, "Performance Analysis of Hybrid Metal–Graphene Frequency Reconfigurable Antennas in the Microwave Regime," *IEEE Transactions on Antennas and Propagation*, vol. 65, no. 4, pp. 1558-1569 (2017).

- [13] M. Yasir, P. Savi, S. Bistarelli, A. Cataldo, M. Bozzi, L. Perregrini, S. Bellucci, "A planar antenna with voltage-controlled frequency tuning based on few-layer graphene", *IEEE Antennas and Wireless Propagation Letters*, 16, 2380-2383 (2017).
- [14] X. Huang, A. Alburakan, T. Leng, Z. Hu, J. Huang, Y. Qin, P. Liu, "Graphene metamaterials array based reconfigurable antenna," 2016 International Symposium on Antennas and Propagation (ISAP), Okinawa, pp. 106-107 (2016).
- [15] M. Grande, G. V. Bianco, P. Capezzuto, V. Petruzzelli, F. Prudenzeno, M. Scalora, G. Bruno, A. D'Orazio "Amplitude and phase modulation in microwave ring resonators by doped CVD graphene," *Nanotechnology*, vol. 29, no. 32, p. 325201 (2018).
- [16] M. Grande, G. V. Bianco, D. Laneve, P. Capezzuto, V. Petruzzelli, M. Scalora, F. Prudenzeno, G. Bruno, A. D'Orazio, "Optically transparent wideband CVD graphene-based microwave antennas", *Applied Physics Letters*, vol. 112, no. 251103 (2018).
- [17] M. Grande, G. V. Bianco, M. A. Vincenti, D. De Ceglia, P. Capezzuto, M. Scalora, A. D'Orazio, G. Bruno, "Optically Transparent Microwave Polarizer Based on Quasi-Metallic Graphene", *Scientific Reports*, vol. 5, no. 17083 (2015).
- [18] M. Grande, G. V. Bianco, F. M. Perna, V. Capriati, P. Capezzuto, M. Scalora, G. Bruno and A. D'Orazio, "Reconfigurable and optically transparent microwave absorbers based on deep eutectic solvent-gated graphene", *Scientific Reports* 9, 5463 (2019).
- [19] F. Qin, S. Gao, W.C. Cheng, Y. Liu, H.L. Zhang, G. Wei, "A High-Gain Transmitarray for Generating Dual-Mode OAM Beams", *IEEE Access* vol. 6, pp. 61006-61013 (2018).
- [20] S. V. Hum and J. Perruisseau-Carrier, "Reconfigurable Reflectarrays and Array Lenses for Dynamic Antenna Beam Control: A Review," *IEEE Transactions on Antennas and Propagation*, vol. 62, no. 1, pp. 183-198 (2014).